



Cast Iron Effluent Sump Pumps




J/JH Series


The Solution to General Sump Dewatering

Maximize your production and minimize downtime and maintenance costs with BJM Pumps® J and JH Series dewatering pumps.

- Side discharge to allow easy slide rail assembly mounting
- Advanced double mechanical seal design with separate lip seal to protect against leaks
- Seal Minder® moisture detection system (optional) offers early warning of water in the oil chamber prior to entering the motor
- High flow or high head versions available
- High temperature automatic overload switch protects against motor failure due to overheating
- Thin wall 304 stainless steel motor sleeve for superior heat transfer
- 316 stainless steel models available for corrosion resistant needs

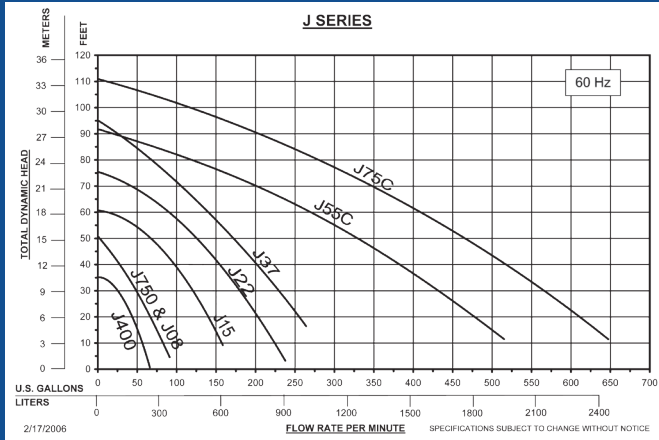

CSA applies to single phase J400 and J750, and three phase J15 and J15H only.

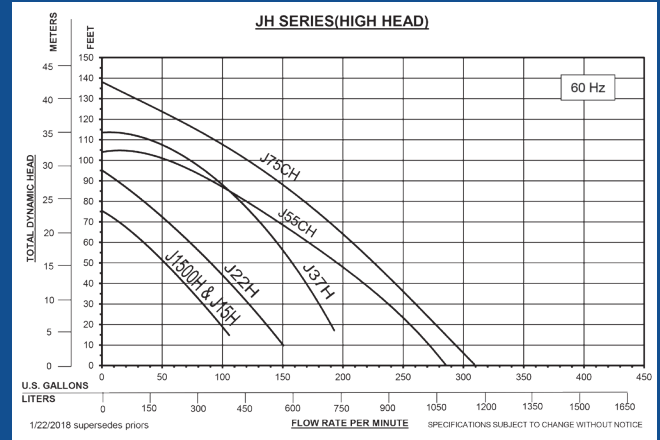

MODEL	DISCH. SIZE	H.P.	VOLT	PHASE	RPM	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	WEIGHT LBS	HEIGHT	WIDTH	CABLE
J400	2"	0.5	115/230	1	3450	7.6/3.8	1/8"	35'	66	40	15.7"	8.5"	33'
J750	2"	1	115/230	1	3450	14/7	3/16"	51'	91	70	17.3"	11.2"	33'
J08	2"	1	208/230/460/575	3	3450	3.5/3.2/1.6/1.3	3/16"	51'	91	58	15.2"	11.2"	33'
J15	3"	2	208/230/460/575	3	3450	6.3/6/3/2.3	3/16"	60'	158	69	16.4"	11.2"	33'
J22	3"	3	208/230/460/575	3	3450	9.45/9/4.5/3.2	3/8"	75'	237	100	18.5"	12.5"	33'
J37	4"	5	208/230/460/575	3	3450	14.7/14/7/5.5	3/8"	95'	264	108	19.7"	12.5"	33'
J55C	4"	7.5	230/460/575	3	3450	21/10.5/7.6	3/8"	92'	515	220	25.5"	20.5"	33'
J75C	4"	10	460/575	3	3450	15/10.5	3/8"	110'	647	255	27.75"	20.5"	33'

MODEL	DISCH. SIZE	H.P.	VOLT	PHASE	RPM	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	WEIGHT LBS	HEIGHT	WIDTH	CABLE
J15H	2"	2	208/230/460/575	3	3450	6.3/6/3/2.3	3/16"	75'	105	69	16.4"	11.2"	33'
J22H	2"	3	208/230/460/575	3	3450	9.45/9/4.5/3.2	3/8"	95'	150	92	18.5"	12.5"	33'
J37H	2"	5	208/230/460/575	3	3450	14.7/14/7/5.5	3/8"	113'	192	105	19.7"	12.5"	33'
J55CH	3"	7.5	230/460/575	3	3450	21/10.5/7.6	3/8"	104'	285	224	25.5"	20.5"	33'
J75CH	4"	10	460/575	3	3450	15/10.5	3/8"	138'	308	248	27.75"	20.5"	33'

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

INDUSTRIAL FLOW SOLUTIONS™

104 John W Murphy Drive
New Haven, CT 06513
Tel: (860) 399-5937
Fax: (860) 399-7784
Web: www.flowsolutions.com

Distributor: